arXiv:1112.2389v1 [math.PR] 11 Dec 2011

Stability of a Server with Greedy Strategy on the Circle

Leonardo T. Rolla, Vladas Sidoravicius
Instituto de Matemática Pura e Aplicada

December 13, 2011

Abstract

We consider a single-server system with stations in each point of the circle. Customers arrive after exponential times, at uniformly-distributed locations. The server moves at finite speed and adopts a greedy routing mechanism. For any value of the speed, we prove that the system is stable as long as the service rate exceeds the arrival rate.

1 Introduction

In this paper we study a greedy single-server system on the unit-length circle $\mathbb{R}/\mathbb{Z}$. Customers arrive following a Poisson process with rate λ. Each arriving customer chooses a position on $\mathbb{R}/\mathbb{Z}$ uniformly at random and waits for service. If there are no customers in the system, the server stands still. Otherwise, the server chooses the nearest waiting customer and travels in that direction at speed $v > 0$, ignoring any new arrivals. Upon reaching the position of such customer, the server stays there until service completion, which takes a random time T that is independent of the past configurations and has expectation μ^{-1}.

The above system was introduced by Coffman and Gilbert in 1987 [1], and is a common example of a routing mechanism that depends on the system state. This is the so-called *greedy server*, due to the simple strategy of blindly targeting the nearest customer.

Continuous-space models provide natural approximations for systems with a large number of service stations embedded in a spacial structure, and their description is usually more transparent than the discrete-space formulation, mostly because the latter often is obscured by combinatorial aspects. However, systems with greedy routing strategies in the continuum are extremely sensitive to microscopic perturbations, and their rigorous study represents a mathematical challenge.

It was conjectured in [1] that the greedy server on the circle should be a stable system when $\lambda < \mu$, for any $v > 0$. Since then, a number of related models have been proposed and studied – see [3] and references therein. In this paper we prove stability for the greedy server.

Definition. We say that t is a *regeneration time* if the system becomes empty at time t, i.e., if there is one customer at time $t-$ and no customers at time $t+$. Let $\tau_\emptyset := \inf\{t > 0 : t \text{ is a regeneration time}\}$. We say that the system is *recurrent* if, starting from the empty state $\emptyset$, there will be a.s. a regeneration time, i.e., $\mathbb{P}^\emptyset[\tau_\emptyset < \infty] = 1$. We say that the system is *stable*, or *positively recurrent*, if $\mathbb{E}^\emptyset[\tau_\emptyset] < \infty$.

Theorem 1. *Suppose that the distribution of the service time T is geometric, exponential, or deterministic. For any $\lambda < \mu$ and any $v > 0$, the greedy server on the circle is stable.*

Remark. In our approach it is crucial that the arrivals are Poisson in space-time. There is a *dynamic* version of the greedy server, where *new arrivals are not ignored* while the server is traveling. This variation might be studied by similar arguments, but the dynamic mechanism introduces some extra complications that will not be considered here. A proof of stability for general service times having an exponential moment follows from the same approach as presented here, requiring a little extra work due to the lack of Markov property. We present the proof for exponentially distributed service times with $\mu = 1$. The cases of geometric or deterministic times only differ in notation.

The greedy server has been compared numerically with the so-called *polling server*, whose strategy is to always travel clockwise regardless of the system state. Simulations indicate that the greedy server is more efficient when there are few customers in the system, and slightly less efficient under intense traffic, as shown in [1, Fig. 5], although both systems seem to behave similarly in the latter case. The rigorous proof of stability for the polling server is relatively simple: it takes a fixed amount of traveling time to visit the whole circle, which gives the server a strong advantage when the workload is too heavy.

In the proof of Theorem 1 we consider the customers environment viewed from the server, an approach that was also used in [2]. In this framework, the server learns only the information that is necessary and sufficient to determine the next movement, and the positions of further waiting customers remain unknown. In [2] it was shown that the greedy server on the real line is transient, which is an important ingredient in our proof of stability.

This paper is divided as follows. We start with a heuristic discussion in order to highlight the main ideas of the proof. Next we give some definitions and notation used throughout the text, and describe the process evolution. We then introduce the framework of the process viewed from the server. In the sequel we define an observable B that will serve as a Lyapunov functional, along with a stopping time $\mathcal{T}$ so that $B_{\mathcal{T}}$ has a downwards drift, and finally prove Theorem 1. The proof of downwards drift is given afterwards, by showing that the greedy server behaves most of the time like a polling server, via a coupling with a system on the infinite line. The latter is studied in the appendix.

2 Heuristics

If the server is busy most of the time, the system must be stable, since in average the service time is smaller than the inter-arrival time. The fundamental problem in showing stability is therefore the possibility that the server spend a long time zigzagging on regions with low density of customers, due to a trapping configuration produced by the stochastic dynamics.

In [2], with S. Foss we considered the analogous model on the real line and showed that this cannot be the case: the server may zigzag for a finite period of time, but it is bound to eventually choose a direction and head that way.

On the same grounds, since the greedy routing mechanism is *local*, this can neither be the case on the circle – at least *until the server realizes that it is not operating on the infinite line.*

Suppose we are given a configuration where the circle is crowded of waiting customers, and, from this point on, our goal is to alleviate this situation. We would like to say that, with high probability, after a short time the server will choose a direction and then cope with its workload as the polling server would.

There are two situations where the server may feel that it is on the circle rather than on the line. First, if it arrives at a given point x for the second time after performing a whole turn on the circle, it will encounter an environment that has been affected by its previous visit. This is not a serious problem, because if it happens it will imply that all the customers which were initially present will have then been served, and typically the server will have served more customers than new ones will have arrived.

The second difference is what poses a real issue. The server has a tendency to go into regions that have been *least recently visited*, since in these regions the average interdistance between customers is smaller, and they have bigger chance to attract the server via its greedy mechanism. This is indeed how transience is proved on $\mathbb{R}$. Let us call the *age* of a point in space the measurement in time units of how recently it was visited by the server in the past. On the line, the age is minimal at the server's position, and *increases as we go further away from the server.* The new regions encountered thus become older and older, and the server surrenders to the fact that the cleared regions it is leaving behind cannot compete with the old regions ahead.

However, this is not true on the circle: the age profile cannot increase indefinitely. This gives rise to the possibility of the following tricky scenario. Imagine that on a tiny region around some point x the system is much older than on any close neighborhood. When the server enters this region, it will take a very long time to finish with all the waiting customers. After finishing with all these customers tightly packed in space, there will no longer be a strong difference between the ages ahead and behind the server, who may end up going back to the region that has just been cleared, invalidating the argument.

We deal with this difficulty by making two key observations. First, the age of the points on the circle is monotone in some sense: there is only one local minimum, located at the server's position, and one local maximum x, and the age increases as we move from the server towards x. Second, if the above scenario effectively happens and the server changes direction, the new configuration may become worse in terms of the number of waiting customers, but will be better in the sense that this sharp peak in the age profile has been flattened. In order to say that the new configuration is "better" in this situation, we need to quantify "badness" taking into account a trade-off between diminishing the overall workload and leveling this singular region with excessively high concentration. This is achieved by considering a Lyapunov functional that combines the total number of customers and the maximum local density.

3 Setup and notation

The symbol $\preccurlyeq$ means *stochastic domination* between random elements taking value on the same partially ordered space. Define $a \wedge b = \min\{a, b\}$, $a \vee b = \max\{a, b\}$, and $[a]^+ = a \vee 0$. The *indicator* that $x \in J$ is denoted by $\mathbb{1}_J(x)$, and the indicator that the system is in a given state at time s is denoted by $\mathbb{1}_{\text{state}}(s)$. The complement of a set J is denoted by J^c when the space where we take the complement is clear.

We consider the circle as an equivalence class $\mathbb{R}/\mathbb{Z}$, i.e., $x \cong y$ if $x - y \in \mathbb{Z}$. Moreover, we identify classes of $\mathbb{R}/\mathbb{Z}$ with their representants on $\mathbb{R}$, and refer to the points or their representants without distinction, unless mentioned otherwise. We denote *arcs* on the circle by $[x, y) \subseteq \mathbb{R}/\mathbb{Z}$, given by the projection of $[x, y) \subseteq \mathbb{R}$ for any pair of representants $x, y \in \mathbb{R}$ such that $x \leqslant y < x + 1$. Analogously for open or closed arcs. We define the *clockwise distance* $\vec{d}$ by $\vec{d}(x, y) = y - x \in [0, 1)$. In particular, $(x, y] = (y, x]^c$ and $\vec{d}(x, y) = 1 - \vec{d}(y, x)$. The distance on $\mathbb{R}/\mathbb{Z}$ is given by $d(x, y) = \vec{d}(x, y) \wedge \vec{d}(y, x)$. We say that f is *increasing* on $[x, y] \subseteq \mathbb{R}/\mathbb{Z}$ if f is increasing on any lifting $[x, y] \subseteq \mathbb{R}$ with $x \leqslant y < x + 1$; analogously for f (non)decreasing.

Evolution of the greedy server system The state of the system at time t is described by the triplet $(\mathscr{C}_t, \mathcal{S}_t, \mathcal{C}_t)$. Here $\mathscr{C}_t$ denotes the set of customers present at the system, $\mathcal{S}_t$ denotes the position of the server, $\mathcal{C}_t \in \mathscr{C}_t$ denotes the position of the customer being served or targeted by the server, and $\mathcal{C}_t = \mathscr{C}_t = \emptyset$ when the system is empty. The process $(\mathscr{C}_t, \mathcal{S}_t, \mathcal{C}_t)_{t \geqslant 0}$ is a strong Markov process, whose stochastic evolution we describe now.

At all times, $t \mapsto \mathcal{S}_t$ is continuous and

$$\frac{\mathrm{d}\mathcal{S}_t}{\mathrm{d}t} = \mathcal{V}_t := \begin{cases} 0, & \mathcal{S}_t = \mathcal{C}_t \text{ or } \mathcal{C}_t = \emptyset, \\ v, & \mathcal{S}_t \neq \mathcal{C}_t,\ \vec{d}(\mathcal{S}_t, \mathcal{C}_t) < \vec{d}(\mathcal{C}_t, \mathcal{S}_t), \\ -v, & \mathcal{S}_t \neq \mathcal{C}_t,\ \vec{d}(\mathcal{S}_t, \mathcal{C}_t) \geqslant \vec{d}(\mathcal{C}_t, \mathcal{S}_t), \end{cases} \tag{1}$$

in the sense of right derivative.

There are three different regimes: *moving* when $\mathcal{S}_t \neq \mathcal{C}_t \in \mathbb{R}/\mathbb{Z}$, *serving* when $\mathcal{S}_t = \mathcal{C}_t$, and *idle* when $\mathcal{C}_t = \emptyset$. While the system is *idle*, $\mathcal{S}$ and $\mathcal{C}$ remain unchanged until an arrival happens. While the server is *moving*, the evolution of $\mathcal{S}$ obeys (1), and $\mathcal{C}$ remains constant. This regime lasts until *service starts*, i.e., until the time s when $\mathcal{S}_s = \mathcal{C}_s$. During *service*, the evolution of $\mathcal{S}$ is again given by (1), $\mathcal{C}$ also remains constant, and *service finishes* according to an exponential clock of rate 1.

The moments when *service finishes* will be called *departure times*. At departure times t, the new regime will be either *moving* or *idle*. First the current customer is removed from the system: $\mathscr{C}_t = \mathscr{C}_{t-} \setminus \{\mathcal{C}_{t-}\}$. Then $\mathcal{C}_t$ is chosen as the nearest waiting customer, if any:

$$\mathcal{C}_t = \arg\min\{d(\mathcal{S}_t, x) : x \in \mathscr{C}_t\}, \quad \text{or} \quad \mathcal{C}_t = \emptyset \text{ if } \mathscr{C}_t = \emptyset. \tag{2}$$

During the whole evolution, *arrivals* happen at rate λ. An *arrival* consists of adding to $\mathscr{C}$ a new point z chosen uniformly at random on $\mathbb{R}/\mathbb{Z}$, i.e., $\mathscr{C}_t = \mathscr{C}_{t-} \cup \{z\}$. If $\mathcal{C}_{t-} \neq \emptyset$, i.e., the server was moving or serving, this is the only change. If $\mathcal{C}_{t-} = \emptyset$, i.e., the system was idle, then also $\mathcal{C}$ is updated by $\mathcal{C}_t = z$ and a.s. the new regime is moving.

4 The process viewed from the server

The process $(\mathscr{C}_t, \mathcal{S}_t, \mathcal{C}_t)_{t \geqslant 0}$ may be constructed from to point processes: a Poisson Point Process $\nu \subseteq (\mathbb{R}/\mathbb{Z}) \times \mathbb{R}_+$ with intensity $\lambda \cdot \mathrm{d}x\mathrm{d}t$, each point corresponding to the arrival of a new customer at position x at time t; and the Poisson Point Process $\mathscr{T} \subseteq \mathbb{R}_+$ corresponding to possible departure times (each mark $t \in \mathscr{T}$ effectively corresponds to a departure time if a customer was being served up to time $t-$, and is ignored if the server was idle or moving). For u and w denoting functions on $\mathbb{R}/\mathbb{Z}$ or constants, let

$$\Gamma_u^w = \{(x,s) : x \in \mathbb{R}/\mathbb{Z}, u(x) < s \leqslant w(x)\} \subseteq (\mathbb{R}/\mathbb{Z}) \times \mathbb{R}_+.$$

The σ-algebra $\mathcal{F}_t = \sigma(\nu_t, \mathscr{T}_t)$, where $\nu_t = \nu \cap \Gamma_0^t$ and $\mathscr{T}_t = \mathscr{T} \cap [0,t]$, contains all the information about arrivals and departures up to time t, and consequently about $(\mathscr{C}_s, \mathcal{S}_s, \mathcal{C}_s)_{s \in [0,t]}$.

The process $(\mathcal{S}_t, \mathcal{C}_t)_{t \geqslant 0}$ is not Markovian. The conditional distribution of $(\mathcal{S}_s, \mathcal{C}_s)_{s \geqslant t}$ given $\mathcal{F}_t$ depends on both $(\mathcal{S}_t, \mathcal{C}_t)$ and $\mathscr{C}_t$. Yet the only interaction between $(\mathcal{S}, \mathcal{C})$ and $\mathscr{C}$ is given by (2). Namely, at each *departure time* t, $\mathscr{C}_t$ is *queried* about the *nearest* waiting customer $\mathcal{C}_t$, if any. The position of $\mathcal{C}_t$ reveals that $\mathscr{C}_t \cap [\mathcal{S}_t - z, \mathcal{S}_t + z] = \{\mathcal{C}_t\}$, where $z = d(\mathcal{S}_t, \mathcal{C}_t) < \frac{1}{2}$, and on the other hand it gives no information about the complementary set $\mathscr{C}_t \cap [\mathcal{S}_t - z, \mathcal{S}_t + z]^c$ of waiting customers.

In the sequel we discuss the conditional distribution of $\mathscr{C}_t$ given $(\mathcal{S}_s, \mathcal{C}_s)_{s \in [0,t]}$, the role played by this conditional law, and the evolution of this law itself.

Markovianity without $\mathscr{C}_t$ By the Markov property of $(\mathscr{C}_t, \mathcal{S}_t, \mathcal{C}_t)_{t\geqslant 0}$ with respect to $\{\mathcal{F}_t\}_{t\geqslant 0}$ we have that the conditional law of $(\mathcal{S}_s, \mathcal{C}_s)_{s\geqslant t}$ satisfies

$$\mathscr{L}\left[(\mathcal{S}_s, \mathcal{C}_s)_{s\geqslant t}\middle|\mathcal{F}_t\right] = \mathscr{L}\left[(\mathcal{S}_s, \mathcal{C}_s)_{s\geqslant t}\middle|(\mathscr{C}_t, \mathcal{S}_t, \mathcal{C}_t)\right].$$

Let

$$\mathcal{G}_t = \sigma\left((\mathcal{S}_s, \mathcal{C}_s)_{s\in[0,t]}\right) \subseteq \mathcal{F}_t.$$

In the sequel we consider the triple $\left(\mathscr{L}(\mathscr{C}_t|\mathcal{G}_t), \mathcal{S}_t, \mathcal{C}_t\right)$ and study its evolution.

By the observations in the previous paragraph, the evolution $(\mathcal{S}_s, \mathcal{C}_s)_{s\in[0,t]}$ gives information about $\nu \cap (\mathbb{R}/\mathbb{Z}) \times (0, t]$ in a very precise way. At each departure time s, the new $\mathcal{C}_s$ is chosen as the point of $\mathscr{C}_s$ that is closest to $\mathcal{S}_s$. At these times, $\mathcal{C}_s$ is given by $\mathcal{S}_s \pm z$, where z is the smallest distance for which there is a point $(\mathcal{S}_s \pm z, s')$ with $s' \in (0, s]$ in ν, not considering the points that correspond to customers who have already left the system. This reveals a rectangle $[\mathcal{S}_s - z, \mathcal{S}_s + z] \times (0, s]$ where ν has no more points that will participate in the construction of $(\mathscr{C}_r)_{r>s}$, and the law of $\mathscr{C}_s$ outside $[\mathcal{S}_s - z, \mathcal{S}_s + z]$ is not affected. For times r between s and the next departure time, $\mathscr{C}_r$ is given by the union of $\mathscr{C}_s$ and the Poisson arrivals corresponding to $\nu \cap (\mathbb{R}/\mathbb{Z}) \times (s, r]$. For the times s when the system is in the idle state, the revealed rectangle is the whole $\mathbb{R}/\mathbb{Z} \times (0, s]$.

Iterating this argument, by time t the configuration ν has been revealed on the region given by the union of such rectangles. Since all these rectangles have their base on $t = 0$, their union is of the form $\Gamma_0^{w_t}$, where $w_t(x)$ denotes the maximal height among all the rectangles whose base contains the point x. In other words, the value of $w_t(x)$ is the most recent among: the departure times $s \in (0, t]$ such that $x \in [\mathcal{S}_s - z, \mathcal{S}_s + z]$; and the times $s \in (0, t]$ when the system was idle. The set of waiting customers $\mathscr{C}_t \setminus \{\mathcal{C}_t\}$ is thus determined by the configuration ν on the complementary region $\Gamma_{w_t}^t$. Therefore, the conditional distribution of $\mathscr{C}_t \setminus \{\mathcal{C}_t\}$ given $\mathcal{G}_t$ is that of an inhomogeneous Poisson process on $\mathbb{R}/\mathbb{Z}$, with local intensity at each point x given by

$$\lambda\left[t - w_t(x)\right] \mathrm{d}x.$$

In summary,

$$\mathscr{L}\left[(\mathcal{S}_s, \mathcal{C}_s)_{s\geqslant t}\middle|\mathcal{G}_t\right] = \mathscr{L}\left[(\mathcal{S}_s, \mathcal{C}_s)_{s\geqslant t}\middle|(w_t, \mathcal{S}_t, \mathcal{C}_t)\right].$$

Since the evolving region $(\Gamma_0^{w_t})_{t\geqslant 0}$ is increased at departure times t by adding a rectangle to $\Gamma_0^{w_{t-}}$, this rectangle being in turn determined by $\mathcal{S}_t$ and $\mathcal{C}_t$, we have

$$\mathscr{L}\left[(w_s, \mathcal{S}_s, \mathcal{C}_s)_{s\geqslant t}\,\middle|\,(w_s, \mathcal{S}_s, \mathcal{C}_s)_{s\in[0,t]}\right] = \mathscr{L}\left[(w_s, \mathcal{S}_s, \mathcal{C}_s)_{s\geqslant t}\,\middle|\,(w_t, \mathcal{S}_t, \mathcal{C}_t)\right],$$

i.e., $(w_t, \mathcal{S}_t, \mathcal{C}_t)$ is a Markov process with respect to its natural filtration. In our framework, we shall consider

$$u_t = w_t - t \leqslant 0$$

instead of w, so that $(u_t, \mathcal{S}_t, \mathcal{C}_t)_{t\geqslant 0}$ is a time-homogeneous strong Markov process.

Evolution of $(u_t, \mathcal{S}_t, \mathcal{C}_t)$ The law of the evolution $(u_t, \mathcal{S}_t, \mathcal{C}_t)_{t\geqslant 0}$ is given as follows. As before, the system may be in one of three regimes, determined by $(\mathcal{S}_t, \mathcal{C}_t)$.

While *moving* or *serving*, the evolution of $\mathcal{S}$ and $\mathcal{C}$ are given by the same rules as in the previous section: $\mathcal{C}$ remains constant, $\mathcal{S}$ satisfies (1), and in the serving regime *service finishes* at rate 1. We no longer have $\mathscr{C}$ to account for the whole set of waiting customers. Instead of randomly adding new customers at rate λ, this information is now encoded in the function $u(x)$, with the rule

$$\frac{\mathrm{d}u_t(x)}{\mathrm{d}t} = -1 \quad \forall\, x \in \mathbb{R}/\mathbb{Z}, \tag{3}$$

which rather accounts for the time period when new customers have been arriving to the system at location $\mathrm{d}x$.

At *departure times*, instead of choosing the nearest point in $\mathscr{C}_t$ as in (2), we take what would be nearest point in a realization of a Poisson Point Process on $\mathbb{R}/\mathbb{Z}$ with intensity $-u_t(x)\mathrm{d}x$. More precisely, at the departure times the system goes through an instantaneous random transition, which may lead to either a *moving* or an *idle* state, as we describe below. Let $0 < E < \infty$ and $0 < U < 1$ denote exponential and uniform random variables, independent of each other and of the construction up to time $t-$. The meaning of E is that the measure of the interval that needs to be explored before finding a point is exponentially distributed, and U is important in deciding the position of such point in the boundary of this explored interval. The total intensity of waiting customers potentially present in the system is given by

$$A(u) = \int_{\mathbb{R}/\mathbb{Z}} -\lambda u(x)\mathrm{d}x.$$

If $E \geqslant A(u_{t-})$, take

$$\mathcal{C}_t = \emptyset,$$

and the system becomes *idle*. Otherwise, let $0 < z < \frac{1}{2}$ be the unique number such that $\int_{\mathcal{S}_t - z}^{\mathcal{S}_t + z} (-\lambda u_{t-})\mathrm{d}x = E$, let $a = -u_{t-}(\mathcal{S}_t - z)$, $b = -u_{t-}(\mathcal{S}_t + z)$, choose

$$\mathcal{C}_t = \begin{cases} \mathcal{S}_t - z, & U \in (0, \frac{a}{a+b}), \\ \mathcal{S}_t + z, & U \in [\frac{a}{a+b}, 1), \end{cases} \tag{4}$$

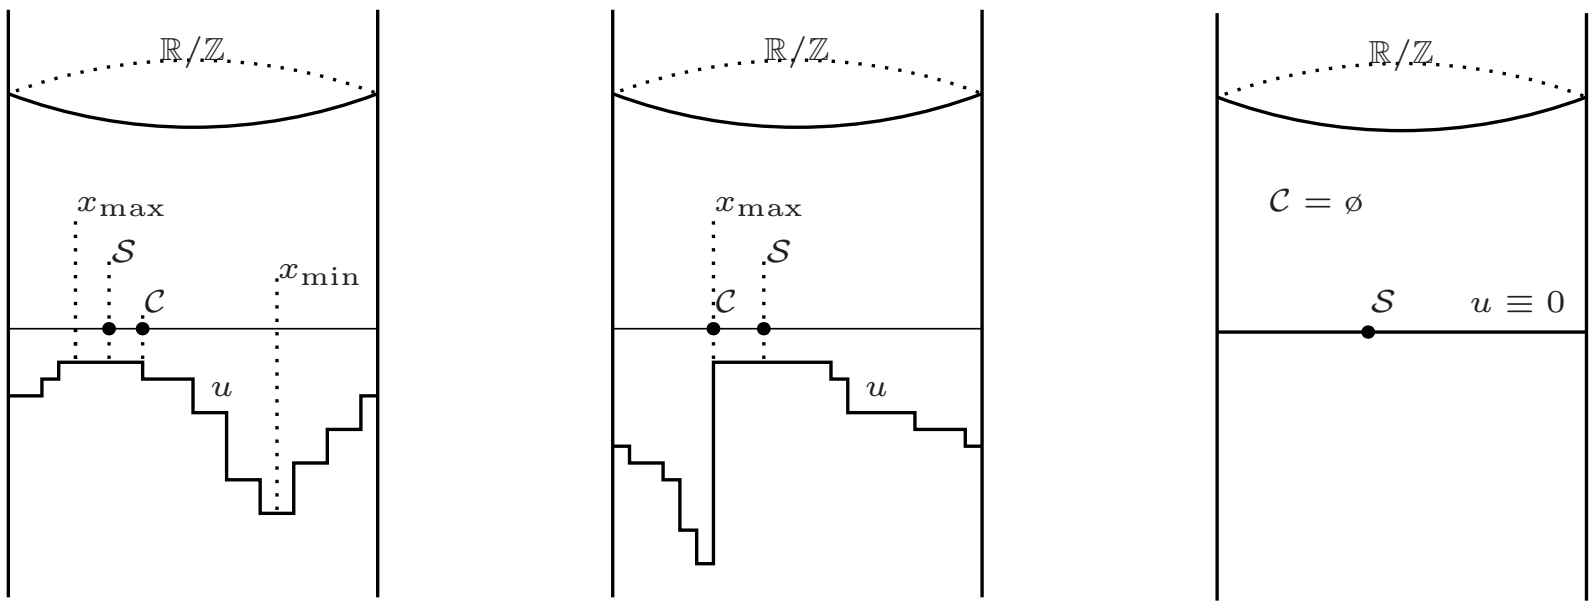

Figure 1: Three examples of *proper potentials* $u(x)$. Together with *compatible* $\mathcal{S}$ and $\mathcal{C}$, these give *proper states.*

and the new regime is *moving*. Finally take

$$u_t(x) = \begin{cases} u_{t-}(x) \cdot \mathbb{1}_{[\mathcal{S}_t - z, \mathcal{S}_t + z]^c}(x), & E < A(u_{t-}), \\ 0, & E \geqslant A(u_{t-}). \end{cases} \tag{5}$$

The *idle* regime $\mathcal{C} = \emptyset$ can only be achieved together with $u \equiv 0$ on $\mathbb{R}/\mathbb{Z}$. While the system is idle, the state $(u, \mathcal{S}, \mathcal{C})$ remains unchanged until the first customer arrival, which happens according to an exponential clock of rate λ. The *arrival* consists of letting $\mathcal{C}_t = z$, where z is chosen uniformly on $\mathbb{R}/\mathbb{Z}$. Immediately after an arrival, a.s. the new regime is *moving*.

Framework A piecewise continuous, upper semi-continuous function $u(x) \leqslant 0$ on $\mathbb{R}/\mathbb{Z}$ is called a *potential*. Note that the evolution described above can start from any given potential u and points $\mathcal{S}, \mathcal{C}$ such that $\mathcal{C} \neq \emptyset$ if $u \not\equiv 0$. For shortness, the triplet $(u, \mathcal{S}, \mathcal{C})$ will be denoted by $\mathcal{U}$. Let $\mathbb{P}^{\mathcal{U}}$ denote the law of $(\mathcal{U}_t)_{t \geqslant 0}$ starting from $\mathcal{U}$ at $t = 0$.

We say that u is a *proper potential* if there exist $x_{\min}, x_{\max} \in \mathbb{R}/\mathbb{Z}$ such that u is non-decreasing on the arc $[x_{\min}, x_{\max}]$ and non-increasing on the arc $[x_{\max}, x_{\min}]$, or if u is monotone on any arc not containing $x_{\max}$, see Figure 1. Given a proper potential u, we say that $(\mathcal{S}, \mathcal{C})$ are *compatible* with u if, either $u(\mathcal{S}) = u(\mathcal{C}) = u(x_{\max})$, or $\mathcal{C} = \emptyset$ and $u \equiv 0$. In this case we say that $\mathcal{U} = (u, \mathcal{S}, \mathcal{C})$ is a *proper state.*

Proposition 2. *Starting from a proper state* $\mathcal{U}$, $\mathbb{P}^{\mathcal{U}}$*-a.s. the process* $(\mathcal{U}_t)_{t \geqslant 0}$ *remains in proper states for every* $t > 0$.

Proof. When moving or serving, the value of u is maximal on the shortest arc between $\mathcal{S}$ and $\mathcal{C}$, u evolves according to (3), and $\mathcal{S}$ moves towards $\mathcal{C}$ along this shortest arc. When the system is idle, $u \equiv 0$. Finally, at departure times, u is updated by increasing its value to 0 on an arc centered at $\mathcal{S}$ and ending at $\mathcal{C}$. All these changes in $\mathcal{U}$ preserve the condition of being a proper state. ☐

Remark. Although $\mathscr{C}_t$ is not determined by $(\mathcal{S}_t, \mathcal{C}_t)$, we have that $\mathscr{C}_t = \emptyset$ if and only if $\mathcal{C}_t = \emptyset$, and it is thus sufficient to consider the process $(\mathcal{U}_t)_{t \geqslant 0}$ in the study of positive recurrence, defined on page 2. This is the approach used henceforth.

5 Proof of stability

The goal of this this section is to prove Theorem 1. In Section 5.1 we define a Lyapunov functional B and a stopping time $\mathcal{T}$. We then state Proposition 3 about the downwards drift of B at time $\mathcal{T}$, and use it to prove Theorem 1. In Section 5.2 we prove Proposition 3 making use of Proposition 5, which states that the total time that the server spends traveling before time $\mathcal{T}$ is stochastically bounded. Finally, in Section 5.3 we prove Proposition 5. The latter relies on an adaption of a result in [2] about the trajectory of the greedy server on the real line, which is rather technical and is postponed to Appendix A.

We spell some formulae for later reference.

$$\eta = 1 - \lambda, \qquad \Psi = 2\eta^{-1}, \qquad \epsilon = \frac{\eta\lambda}{8}, \qquad \delta = \frac{\epsilon}{2\Psi}. \tag{6}$$

The reason for these definitions will become clear as they are used in the proof.

5.1 Lyapunov functional and stopping times

Given a proper potential u, let

$$N = N(u) = \sup_{x \in \mathbb{R}/\mathbb{Z}} -u(x),$$
$$B = B(u) = A(u) + 4\epsilon N(u).$$

Notice that the evolution of u is given by (3) when the state is moving or serving, at departure times it jumps upwards according to (5), and it remains constant when the state is idle. It thus follows that

$$u_{t+s} \geqslant u_t - s \qquad \forall\ s, t \geqslant 0. \tag{7}$$

Since $\lambda + 4\epsilon < 1$, it follows from (7) that

$$B(u_{t+s}) \leqslant B(u_t) + s \qquad \forall\ s, t \geqslant 0. \tag{8}$$

Let B_* denote a finite number that will be fixed later. We claim that, for any proper state $\mathcal{U}$ with $B(u) \leqslant B_*$,

$$\mathbb{P}^{\mathcal{U}}\left[\tau_{\varnothing} < \frac{1}{2v} + 1\right] \geqslant \big(1 - e^{-1}\big) \exp\Big(- B_* - 1 - \frac{1}{2v}\Big) > 0. \tag{9}$$

To see why the claim is true, consider the event that the server travels towards the nearest customer $\mathcal{C}$, then finishes service within $T < 1$ time unit, and at this departure time the next state given by (4) and (5) is idle. When these events hold, since the distance $d = d(\mathcal{S}, \mathcal{C})$ is at most $\frac{1}{2}$, this departure time happens at $t' = \frac{d}{v} + T < \frac{1}{2v} + 1$, implying that $\tau_{\varnothing} < \frac{1}{2v} + 1$. The first term on the right-hand side corresponds to the probability that $T < 1$. The second term is a lower bound for the the conditional probability that $\mathcal{C}_{t'} = \varnothing$ given t', since the latter is given by $e^{-A(u_{t'})} \geqslant e^{-B(u_{t'})}$ which by (8) is bounded by $e^{-B(u)-t'}$, proving the claim.

By (8) and (9), the proof of Theorem 1 reduces to showing that

$$\sup\Big\{\mathbb{E}^{\mathcal{U}}\left[\tau_{\{B \leqslant B_*\}}\right] : \mathcal{U} \text{ proper state, } B(u) < \bar{B}\Big\} < \infty \quad \forall \bar{B} < \infty, \tag{10}$$

where $\tau_{\{B \leqslant B_*\}} = \inf\{t : B(u_t) \leqslant B_*\}$.

Let $\mathcal{U}$ be a proper state such that $B(u) > B_*$. In the proof of (10) we study the behavior of $B(u_t)$ at a particular stopping time $\mathcal{T}$ that is defined below.

Define the sets

$$\begin{aligned} U &= \left\{x \in \mathbb{R}/\mathbb{Z} : u(x) < -\tfrac{N}{2}\right\}, \\ G_t &= \left\{x \in \mathbb{R}/\mathbb{Z} : u_t(x) > -t\right\}. \end{aligned} \tag{11}$$

Since u is a proper potential, U must be either $\mathbb{R}/\mathbb{Z}$ or an open arc. Notice that $G_0 = \emptyset$ and by (7) we have that G_t is non-decreasing in t. By (3) and (5), it may only increase at departure times t, by adding a closed arc containing $\mathcal{S}_t$ and $\mathcal{C}_t$. Thus G_t is always either $\emptyset$, or all $\mathbb{R}/\mathbb{Z}$, or a closed arc containing $\mathcal{S}_t$.

We define the following stopping times:

$$\begin{aligned} \mathcal{T}^+ &= \mathcal{T}^+(u) = \Psi B(u), \\ \mathcal{T}_\circ &= \mathcal{T}_\circ(u) = \inf\{t : G_t \supseteq \mathbb{R}/\mathbb{Z}\}, \\ \mathcal{T}_\Upsilon &= \mathcal{T}_\Upsilon(u) = \inf\{t : G_t \supseteq U\}, \\ \mathcal{T} &= \mathcal{T}(u) = \mathcal{T}_\circ \wedge \mathcal{T}_\Upsilon(u) \wedge \mathcal{T}^+(u). \end{aligned} \tag{12}$$

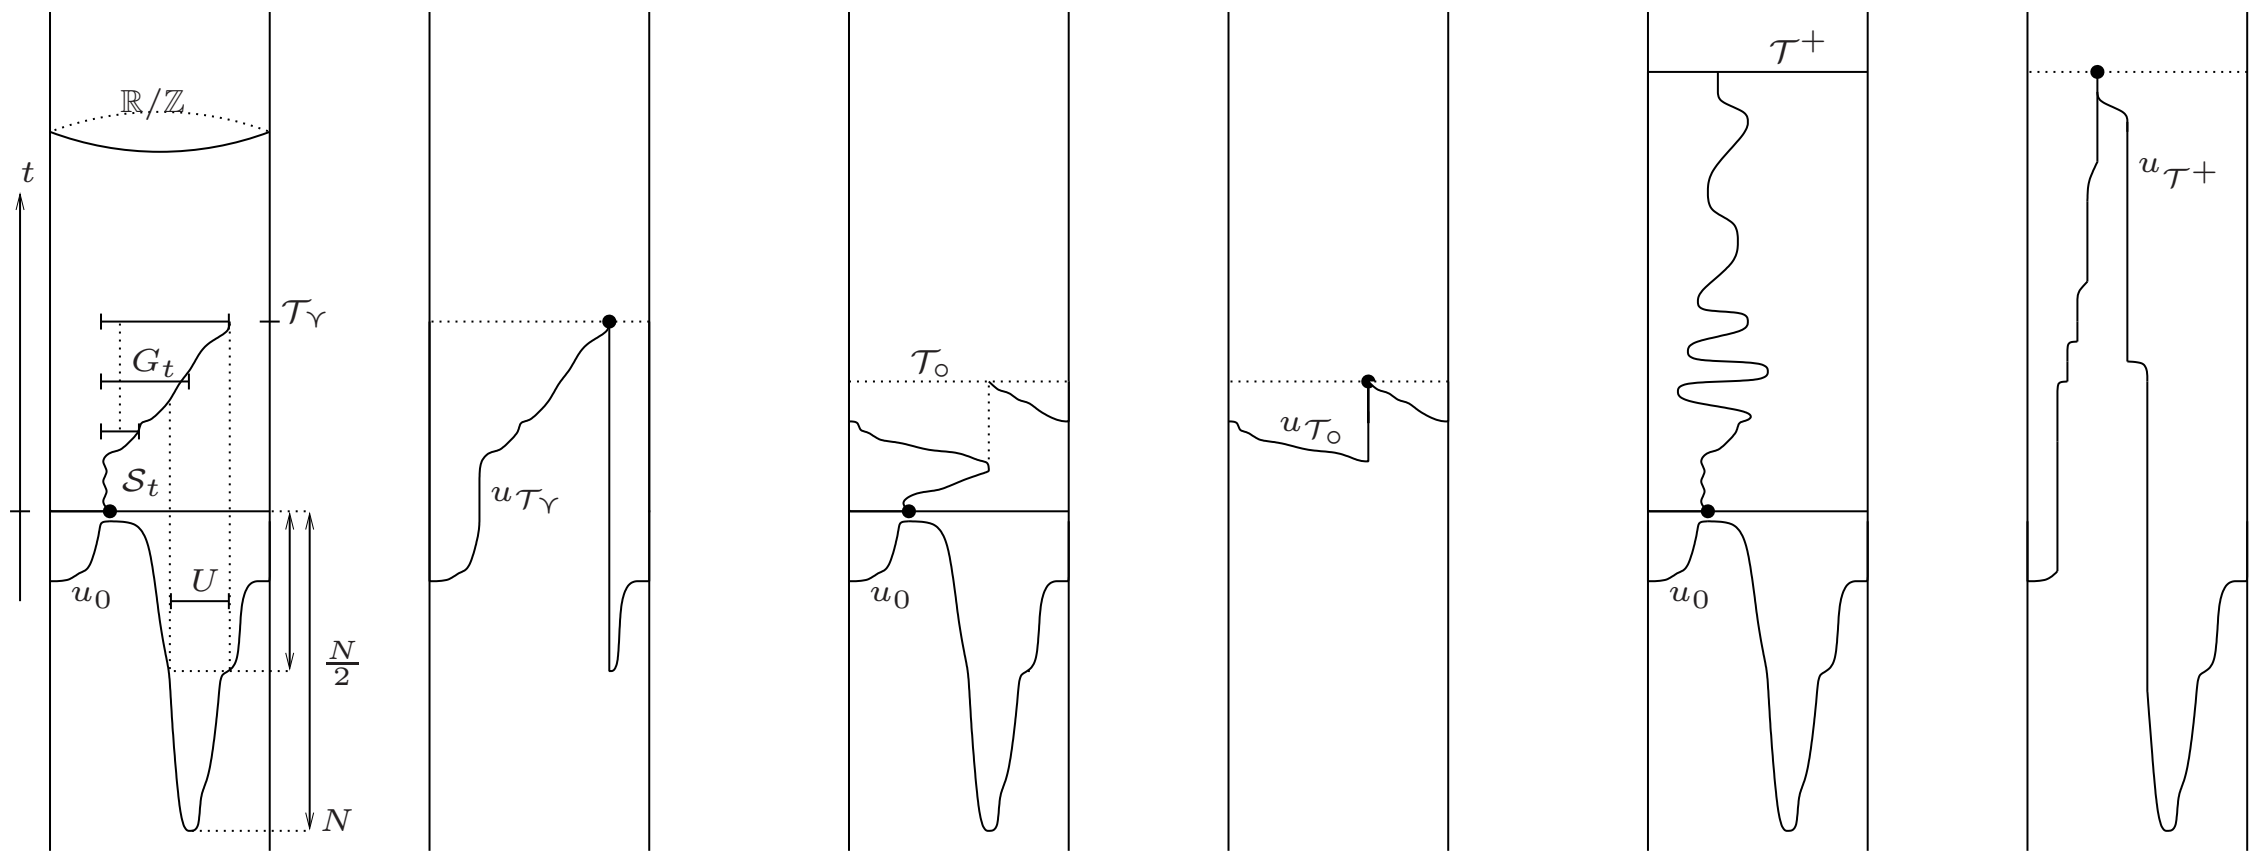

(a) (b) (c)

Figure 2: Evolution of G_t starting from a given potential u_0, with the new potential $u_{\mathcal{T}}$ at the stopping time $\mathcal{T}$. From left to right there are three pairs of graphs, each one embedded in the space-time $(\mathbb{R}/\mathbb{Z})\times\mathbb{R}$. In (a) we depict a typical example when $\mathcal{T}=\mathcal{T}_{\curlyvee}$. In (b) we show an instance where $\mathcal{T}=\mathcal{T}_{\circ}$. Finally in (c) there is an example where the server remains confined for a long time, preventing the condition for $\mathcal{T}_{\curlyvee}$ to be attained up to time $\mathcal{T}=\mathcal{T}^+$. Each pair represents the system evolution and the resulting potential: the graph on the left shows the parametrized curves $(\mathcal{S}_t,t)_{t\in[0,\mathcal{T}]}$ and $(x,u_0(x))_{x\in\mathbb{R}/\mathbb{Z}}$, and on the right there is $(x,u_{\mathcal{T}}(x)+\mathcal{T})_{x\in\mathbb{R}/\mathbb{Z}}$ together with the point $(\mathcal{S}_{\mathcal{T}},\mathcal{T})$.

It follows from (8) that

$$B(u_{\mathcal{T}}) \leqslant B(u)+\mathcal{T} \leqslant B(u)+\mathcal{T}^+ = (\Psi+1)B(u). \tag{13}$$

A few comments are in order. Normally, $\mathcal{T}$ is attained because the condition for $\mathcal{T}_{\curlyvee}$ is attained. The deterministic time $\mathcal{T}^+$ is a *safety caution*: it bounds the possible damage that is caused when this condition is not attained in due time. The presence of $\mathcal{T}_{\circ}$ in the definition of $\mathcal{T}$ is innocuous from a formal point of view, since $\mathcal{T}_{\circ} \geqslant \mathcal{T}_{\curlyvee}$. We write it to indicate that $\mathcal{T}_{\curlyvee}$ may be attained in two conceptually different situations: either because U is "crossed" by $(G_s)_{s\geqslant 0}$, or because U is partly taken by $(G_s)_{s\geqslant 0}$ from one direction and then from the other, in which case the whole circle $\mathbb{R}/\mathbb{Z}$ is taken. See Figure 2.

Proposition 3 (Downwards drift)**.** *For any proper state* $\mathcal{U}$*,*

$$\mathbb{P}^{\mathcal{U}}\big(B(u_{\mathcal{T}}) \leqslant (1-\epsilon)B(u)\big) \geqslant 1-\rho, \tag{14}$$

where $\rho=\rho(B(u))$ *satisfies* $\rho(B)\to 0$ *as* $B\to\infty$*, and* ϵ *defined in (6).*

Writing $D(\cdot) = \log \frac{B(\cdot)}{B_*}$, (13) and (14) imply that

$$\mathbb{P}^{\mathcal{U}}\left(D(u_{\mathcal{T}}) \leqslant D(u) - \epsilon\right) \geqslant 1 - \rho, \quad D(u_{\mathcal{T}}) \leqslant D(u) + \Psi, \quad \mathcal{T} \leqslant \mathcal{T}^+ = \Psi B_* e^D. \tag{15}$$

We are going to use the following fact, whose proof is omitted.

Lemma 4. *Let* $(Y_n)_{n\in\mathbb{N}}$ *be i.i.d. Bernoulli random variables with*

$$\mathbb{P}(Y_1 = \Psi) = 1 - \mathbb{P}(Y_1 = -\epsilon) = \rho.$$

Write $\mathbb{P}^s$ *for the law of* $(S_n)_{n\in\mathbb{N}}$ *given by* $S_n = s + Y_1 + \cdots + Y_n$*, and define* $\sigma = \inf\{n : S_n \leqslant 0\}$*. Then there exists* $\rho_* > 0$ *such that* $\mathbb{E}^s[\sigma e^{\Psi\sigma}] < \infty$ *for any* $\rho \leqslant \rho_*$ *and* $s < \infty$*.*

Proof of Theorem 1. We need to show (10). First we use Proposition 3 to fix the value of B_* with the property that $\rho(B) \leqslant \rho_*$ for any $B > B_*$.

Let $\mathcal{U}$ be a proper state such that $B_* < B(u) < \bar{B}$. We start with $D_0 = D(u_0) > 0$. Consider the stopping time $\mathcal{T}_1 = \mathcal{T}(u_0)$ defined by (12) and define $D_1 = D(u_{\mathcal{T}_1})$. For the shifted process $(\mathcal{U}_{\mathcal{T}_1+t})_{t\geqslant 0}$, consider the stopping time $\mathcal{T}_2 = \mathcal{T}(u_{\mathcal{T}_1})$ and write $D_2 = D(u_{\mathcal{T}_1+\mathcal{T}_2})$. Analogously, once $\mathcal{T}_1, \mathcal{T}_2, \dots, \mathcal{T}_n$ have been constructed, consider, for the shifted process $(\mathcal{U}_{\mathcal{T}_1+\mathcal{T}_2+\cdots+\mathcal{T}_n+t})_{t\geqslant 0}$, the stopping time $\mathcal{T}_{n+1} = \mathcal{T}(u_{\mathcal{T}_1+\mathcal{T}_2+\cdots+\mathcal{T}_n})$, and write $D_{n+1} = D(u_{\mathcal{T}_1+\mathcal{T}_2+\cdots+\mathcal{T}_n+\mathcal{T}_{n+1}})$. Let $\gamma = \inf\{n : D_n \leqslant 0\}$.

Taking $s = D_0$, it follows from (15) that

$$(D_{n\wedge\gamma})_{n=0,1,2,\dots} \preccurlyeq ([S_{n\wedge\sigma}]^+)_{n=0,1,2,\dots},$$

whence $\gamma \preccurlyeq \sigma$. Therefore we get

$$\frac{\tau_{\{B\leqslant B_*\}}}{\Psi B_*} \leqslant \sum_{n=1}^{\gamma} \frac{\mathcal{T}_n}{\Psi B_*} \leqslant \sum_{n=1}^{\gamma} e^{D_{n-1}} \leqslant \gamma \exp\left[\max_{0\leqslant n<\gamma} D_n\right] \leqslant \gamma e^{D_0+\Psi\gamma},$$

whence by Lemma 4

$$\frac{1}{\Psi B_*}\mathbb{E}^{\mathcal{U}}\left[\tau_{\{B\leqslant B_*\}}\right] \leqslant \mathbb{E}^{\mathcal{U}}\left[\gamma e^{D_0+\Psi\gamma}\right] \leqslant \mathbb{E}^{s}\left[\sigma e^{s+\Psi\sigma}\right] \leqslant \mathbb{E}^{\bar{s}}\left[\sigma e^{\bar{s}+\Psi\sigma}\right] < \infty,$$

where $\bar{s} = \log \frac{\bar{B}}{B_*}$. □

5.2 Downwards drift

Write $A = A(u_0)$, $N = N(u_0)$, $B = B(u_0)$, $A' = A(u_{\mathcal{T}})$, $N' = N(u_{\mathcal{T}})$, $B' = B(u_{\mathcal{T}})$. We need to decompose time in three parts:

$$\mathcal{T} = \mathscr{M} + \mathscr{S} + \mathscr{I}, \tag{16}$$

where

$$\mathscr{M} = \int_0^{\mathcal{T}} \mathbb{1}_{\text{moving}}(s)\mathrm{d}s, \quad \mathscr{S} = \int_0^{\mathcal{T}} \mathbb{1}_{\text{serving}}(s)\mathrm{d}s, \quad \mathscr{I} = \int_0^{\mathcal{T}} \mathbb{1}_{\text{idle}}(s)\mathrm{d}s.$$

By definition of $\mathcal{T}_\circ$, the system cannot be idle for any $t < \mathcal{T}$, thus $\mathscr{I} = 0$. For each $t > 0$, let $\mathcal{N}_t$ denote the *number of departures times* in $(0, t]$. Fix $\mathcal{N} = \mathcal{N}_{\mathcal{T}}$, the number of customers served up to time $\mathcal{T}$. The total time spent with services during $(0, \mathcal{T}]$ is given by

$$\mathscr{S} = \sum_{n=1}^{\mathcal{N}} T_n + \beta T_{\mathcal{N}+1}$$

for some $0 \leqslant \beta < 1$, where $(T_n)_{n\in\mathbb{N}}$ are i.i.d. exponential random variables.

Writing $A_t = A(u_t)$, it follows from (3) that $\frac{\mathrm{d}A_t}{\mathrm{d}t} = \lambda$ for Lebesgue-a.e. $t < \mathcal{T}$. Moreover, $(A_t)_t$ jumps downwards at departure times, and (5) reads as

$$A_t = \left[A_{t-} - E\right]^+ .$$

Since $A_t > 0$ for all $t < \mathcal{T}$, A' satisfies

$$A' = A + \lambda\mathcal{T} - \left(\textstyle\sum_{n=1}^{\mathcal{N}-1} E_n + \beta' E_{\mathcal{N}}\right),$$

where $0 < \beta' \leqslant 1$ and $(E_n)_{n\in\mathbb{N}}$ are i.i.d. exponential random variables.

We now present the last ingredient, which is proved in the next subsection.

Proposition 5 (Polling behavior). *The distribution of $\mathscr{M}$ under $\mathbb{P}^{\mathcal{U}}$ is tight:*

$$\mathbb{P}^{\mathcal{U}}\left\{\mathscr{M} > t\right\} \xrightarrow[t\to\infty]{} 0$$

uniformly over all proper states $\mathcal{U}$.

Proof of Proposition 3. It follows from Donsker's invariance principle and from Proposition 5 that

$$\textstyle\sum_{n=1}^{\mathcal{N}+1} T_n < \mathcal{N} + \delta B, \tag{17}$$

$$\textstyle\sum_{n=1}^{\mathcal{N}-1} E_n > \mathcal{N} - \delta B, \tag{18}$$

$$\mathscr{M} < \delta\Psi B, \tag{19}$$

hold with high probability as $B \to \infty$, uniformly in $\mathcal{U}$.

Assume that (17), (18), and (19) happen. Putting these altogether yields

$$\begin{aligned}
0 \leqslant A' &= A + \lambda\mathcal{T} - \textstyle\sum_{n=1}^{\mathcal{N}-1} E_n - \beta' E_{\mathcal{N}} && \\
&\leqslant A + \lambda\mathcal{T} - \mathcal{N} + \delta B && \text{by (18)} \\
&\leqslant A + \lambda\mathcal{T} - \mathscr{S} + 2\delta B && \text{by (17)} \\
&= A + \lambda\mathcal{T} - \mathcal{T} + \mathscr{M} + 2\delta B && \text{by (16)} \\
&\leqslant A - \eta\mathcal{T} + \delta\Psi B + 2\delta B && \text{by (19)} \\
&\leqslant A - \eta\mathcal{T} + 2\delta\Psi B && \text{since } \Psi > 2 \qquad (20) \\
&< 2B - \eta\mathcal{T} = \eta(\mathcal{T}^+ - \mathcal{T}). && \text{since } A < B,\ 2\delta\Psi < 1
\end{aligned}$$

By the last inequality, we have $\mathcal{T} < \mathcal{T}^+$. It then follows from the definition of $\mathcal{T}$ that $U \subseteq G_{\mathcal{T}}$, whence $u_{\mathcal{T}}(x) > -\mathcal{T}$ for $x \in U$. But by (7) and the definition of U we have $u_{\mathcal{T}}(x) \geqslant u_0(x) - \mathcal{T} \geqslant -N/2 - \mathcal{T}$ for $x \in U^c$. Therefore

$$N' \leqslant N/2 + \mathcal{T}.$$

Combining this and (20):

$$\begin{aligned}
B' - B &\leqslant (-\eta\mathcal{T} + 2\delta\Psi B) + 4(\mathcal{T} - N/2)\epsilon && \\
&\leqslant -\left(2\epsilon - 2\delta\Psi\right) B - (\eta - 4\epsilon)\mathcal{T} && \text{since } N > B \\
&\leqslant -\left(2\epsilon - 2\delta\Psi\right) B && \text{since } 4\epsilon < \eta \\
&= -\epsilon B. && \square
\end{aligned}$$

5.3 Polling behavior

In this section we prove Proposition 5 via a coupling with the greedy server on the real line. The latter eventually moves towards one of the two directions, and spends little time going backwards, which was shown in [2]. We consider a periodic extension of the initial potential u on the circle, and approximate it by another potential with less oscillations, for which we can generalize this result.

Coupling with the greedy server on $\mathbb{R}$ The evolution described in Section 4 may also be used to define a model on the real line, with the difference that the idle state is never attained in this case. A *potential* is a piecewise continuous, upper semi-continuous function $\bar{u}(x) \leqslant 0$ on $\mathbb{R}$ with $\int_{\mathbb{R}} -\bar{u}\mathrm{d}x = \infty$. The evolution of $(\bar{\mathcal{U}}_t)_{t\geqslant 0}$ is defined in the same way as on the circle, i.e., satisfying (1),(3),(4),(5).

Let $\mathcal{U}$ be a proper state on the circle and $\bar{u}$ the *periodic extension* of u on $\mathbb{R}$.

Assumption. *Without loss of generality, in the sequel we assume that* u *attains its maximum at* $\mathcal{S} = 0$. *Take* $\bar{\mathcal{S}} = 0$ *and let* $\bar{\mathcal{C}}$ *be the only representant of* $\mathcal{C}$ *in* $[-\frac{1}{2}, \frac{1}{2})$.

We define

$$H_t = \left\{ x \in \mathbb{R} : \bar{u}_t(x) > -t \right\}.$$

By the same arguments as for the greedy server on $\mathbb{R}/\mathbb{Z}$, H_t is non-decreasing in t, it is empty until the fist departure time, after which it consists of a closed interval containing both $\bar{\mathcal{S}}_t$ and $\bar{\mathcal{C}}_t$.

Define the stopping time

$$\mathcal{T}_{[1]} = \inf \{ t : |H_t| \geqslant 1 \}.$$

For each $t < \mathcal{T}_{[1]}$, we define the map π_t that takes each point $x \in [L(t), L(t)+1) \subseteq \mathbb{R}$ to its projection $x \in \mathbb{R}/\mathbb{Z}$, where $L(t)$ is chosen as follows. If $H_t = \emptyset$, we take $L(t) = -\frac{1}{2}$, otherwise if $H_t \neq \emptyset$, we take $L(t) = \inf H_t$. For a function $w : \mathbb{R} \to \mathbb{R}$ define $\pi_t w = w \circ \pi_t^{-1}$.

Recall from (11) that the set U is either the whole circle or an open arc not containing $\mathcal{S} = 0$. Let

$$\bar{U} = \left\{ x \in \mathbb{R} : \bar{u}(x) < -\tfrac{N(u)}{2} \right\}$$

and take

$$l = \inf \left(\bar{U} \cap [-1, 0] \right), \quad r = \sup \left(\bar{U} \cap [0, 1] \right).$$

Finally consider another initial state given by $\tilde{\mathcal{U}}$ on $\mathbb{R}$ given by $\tilde{\mathcal{S}} = \bar{\mathcal{S}}$, $\tilde{\mathcal{C}} = \bar{\mathcal{C}}$, and

$$\tilde{u}(x) = \begin{cases} \bar{u}(x), & x \in (l, r), \\ -\frac{N}{2}, & \text{otherwise.} \end{cases} \tag{21}$$

Define the evolution $(\tilde{\mathcal{U}}_t)_{t\geqslant 0}$ again by the same rules as for $\bar{\mathcal{U}}$, and consider the stopping time

$$\mathcal{T}_U = \inf \left\{ t : H_t \not\subseteq (l, r) \right\}.$$

Lemma 6 (Coupling)**.** *The evolutions* $(\bar{\mathcal{U}}_t)_{t\geqslant 0}$ *and* $(\tilde{\mathcal{U}}_t)_{t\geqslant 0}$ *on the line and* $(\mathcal{U}_t)_{t\geqslant 0}$ *on the circle may be constructed on the same probability space, satisfying*

$$\mathcal{T}_{\circ} = \mathcal{T}_{[1]}, \qquad \mathcal{T}_{\Upsilon} = \mathcal{T}_U \wedge T_{[1]},$$
$$\mathcal{U}_t = \pi_t\big(\bar{\mathcal{U}}_t\big) \textit{ for all } t < \mathcal{T}_{[1]}, \qquad \bar{\mathcal{U}}_t = \tilde{\mathcal{U}}_t \textit{ for all } t < \mathcal{T}_U.$$

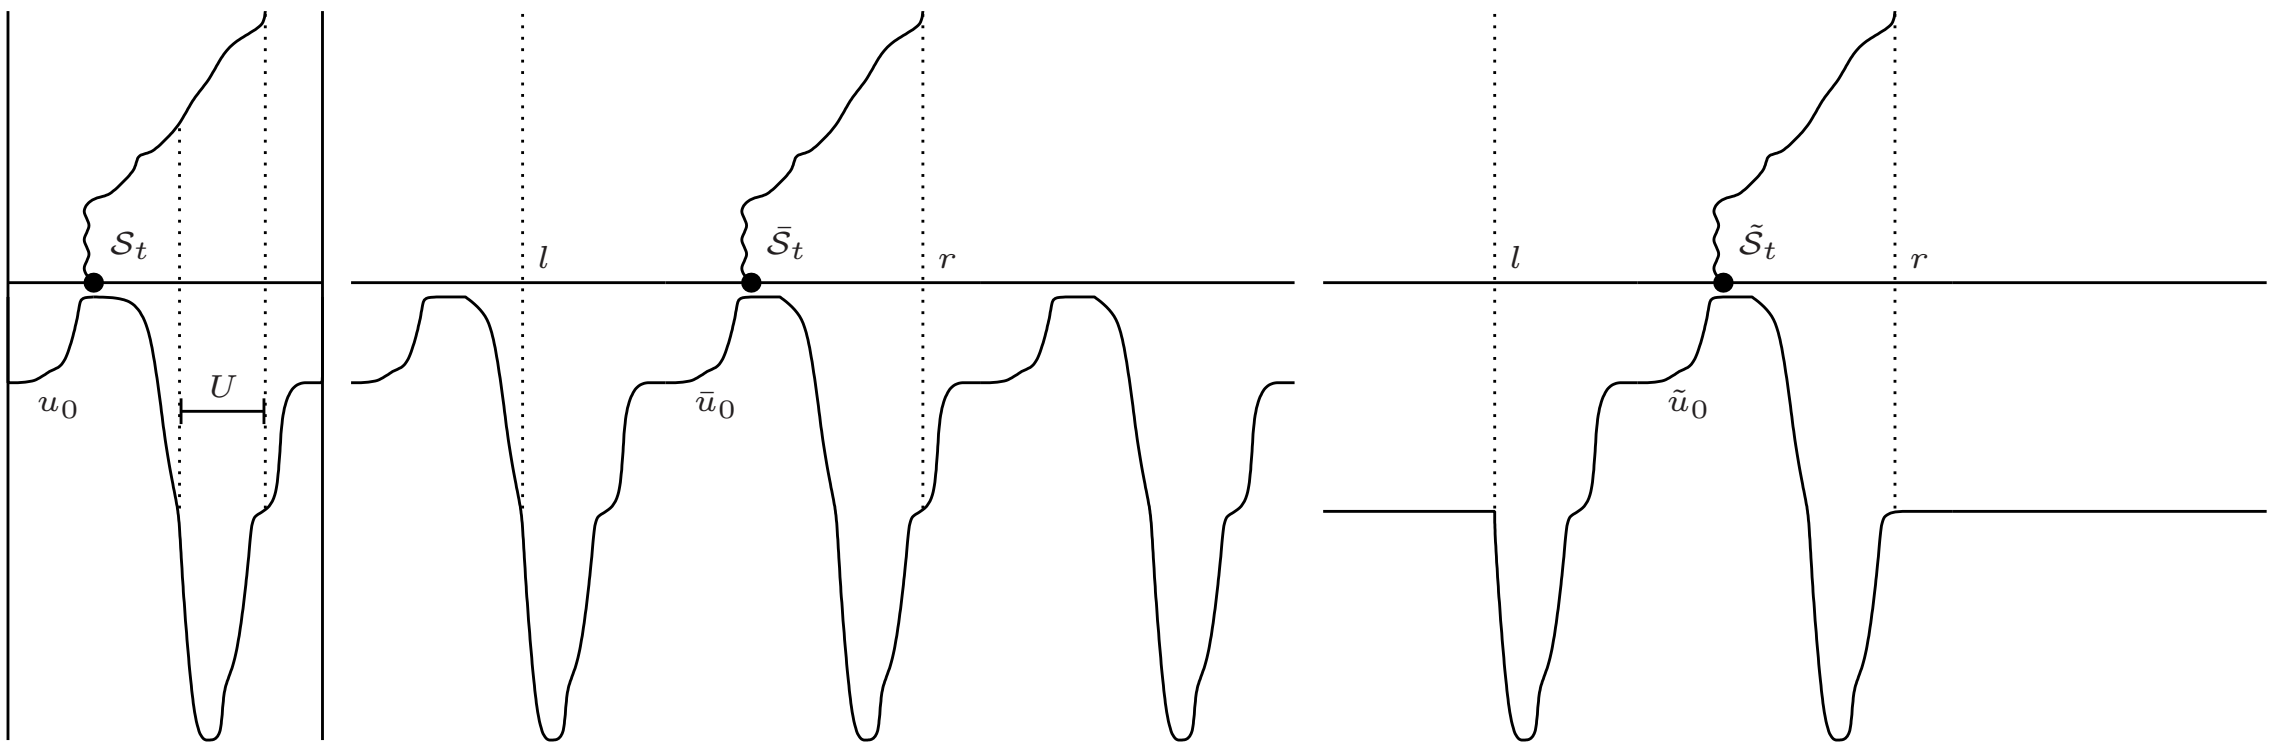

Figure 3: Illustration of how $\mathcal{U}$, $\bar{\mathcal{U}}$, and $\tilde{\mathcal{U}}$ evolve together until time $\mathcal{T}_{\Upsilon}$.

Proof. The coupling given by Lemma 6 is illustrated in Figure 3. The evolution of $(\mathcal{U}_t)_t$ can be constructed using an i.i.d. sequence $(E_n, U_n, T_n)_n$, where E_n and U_n are the exponential uniform used as input for (4) and (5) at each departure time t_n, and T_n are the service times prior to the n-th departure time. (When the system enters the idle state, another clock will be needed to determine the next arrival time, but this state cannot be achieved before $\mathcal{T}_\circ$.)

The coupling is simple: we use the same sequence $(E_n, U_n, T_n)_n$ to build $(\bar{\mathcal{U}}_t)_t$ and $(\tilde{\mathcal{U}}_t)_t$. It remains to check that this coupling a.s. satisfies the identities stated in the lemma, the details are left to the reader. ☐

Strong transience For the evolution $(\tilde{\mathcal{U}}_t)_t$, the total distance traveled by the server between times t and t' is denoted by

$$V_t^{t'}(\tilde{\mathcal{S}}_\cdot) := \int_t^{t'} |\tilde{\mathcal{V}}_s| \mathrm{d}s = v \int_t^{t'} \mathbb{1}_{\text{moving}}(s) \mathrm{d}s.$$

We say that $(\tilde{\mathcal{S}}_t)_{t\geqslant 0}$ is *transient* if, for each $M > 0$, $\sup\{t : \tilde{\mathcal{S}}_t \in [-M, M]\} < \infty$. If moreover

$$\left|\tilde{\mathcal{S}}_t - \tilde{\mathcal{S}}_0\right| \geqslant \frac{1}{3} V_0^t(\tilde{\mathcal{S}}_\cdot) \qquad \text{for all } t > 0, \tag{22}$$

we say that $(\tilde{\mathcal{S}}_t)_{t\geqslant 0}$ is *strongly transient.* The latter means that the total displacement must increase linearly with the traveled distance.

For $0 \leqslant \alpha \leqslant 1$, we say that $\tilde{\mathcal{U}}$ is *α-unimodal* if $\tilde{u}$ attains its maximum on both $\tilde{\mathcal{S}}$ and $\tilde{\mathcal{C}}$, and

$$u(x) \leqslant \alpha \cdot \inf_{y\in[\tilde{\mathcal{S}},x]} \tilde{u}(y),\ \forall\ x > \tilde{\mathcal{S}}, \qquad u(x) \leqslant \alpha \cdot \inf_{y\in[x,\tilde{\mathcal{S}}]} \tilde{u}(y),\ \forall\ x < \tilde{\mathcal{S}}. \tag{23}$$

Notice that the last condition with $\alpha = 1$ is equivalent to $\tilde{u}$ being non-decreasing on $(-\infty, \tilde{\mathcal{S}}]$ and non-increasing on $[\tilde{\mathcal{S}}, \infty)$.

The result below is a consequence of Proposition 1 in [2], written in our notations.

Proposition 7. *Given any* $\tilde{\mathcal{U}}$ *that is* α*-unimodal with* $\alpha = 1$, $(\tilde{\mathcal{S}}_t)_{t\geqslant 0}$ *is a.s. transient.*

In order to prove Proposition 5, we shall obtain a slightly stronger result:

Proposition 8. *Given any* $\tilde{\mathcal{U}}$ *that is* α*-unimodal with* $\alpha = \frac{1}{2}$, *there exists a random time* $\mathcal{T}_Z$ *satisfying* $\mathbb{P}^{\tilde{\mathcal{U}}}(\mathcal{T}_Z < \infty) = 1$, *and such that* $(\tilde{\mathcal{S}}_{\mathcal{T}_Z+t})_{t\geqslant 0}$ *is strongly transient. Moreover, the number of departure times* $\tilde{\mathcal{N}}_{\mathcal{T}_Z}$ *before* $\mathcal{T}_Z$ *is tight:*

$$\mathbb{P}^{\tilde{\mathcal{U}}}\left\{\tilde{\mathcal{N}}_{\mathcal{T}_Z} > k\right\} \xrightarrow[k\to\infty]{} 0$$

uniformly over all α*-unimodal* $\tilde{\mathcal{U}}$.

Proposition 8 is proved in Appendix A by adapting the multi-scale construction of [2] to the case of α-unimodal initial states.

Proof of Proposition 5. We first observe that $\tilde{\mathcal{U}}$, with $\tilde{u}$ defined by (21), is α-unimodal for $\alpha = \frac{1}{2}$. By definition of $\mathscr{M}$ and V,

$$\mathscr{M} = \frac{1}{v}\, V_0^{\mathcal{T}}(\mathcal{S}.) \leqslant \frac{1}{v}\, V_0^{\mathcal{T}_Y}(\mathcal{S}.)$$

and, by Lemma 6,

$$V_0^{\mathcal{T}_Y}(\mathcal{S}.) = V_0^{\mathcal{T}_{[1]}\wedge\mathcal{T}_U}(\bar{\mathcal{S}}.) = V_0^{\mathcal{T}_{[1]}\wedge\mathcal{T}_U}(\tilde{\mathcal{S}}.) \leqslant V_0^{\mathcal{T}_U}(\tilde{\mathcal{S}}.).$$

By definition of $\mathcal{T}_U$, we have that $\tilde{\mathcal{S}}_t \in [l, r] \subseteq [-1, 1]$ for all $t < \mathcal{T}_U$. The distance traveled by the server between consecutive departure times is thus bounded by 2, and therefore

$$V_0^{\mathcal{T}_Z\wedge\mathcal{T}_U}(\tilde{\mathcal{S}}.) \leqslant 2(\tilde{\mathcal{N}}_{\mathcal{T}_Z\wedge\mathcal{T}_U} + 1) \leqslant 2(\tilde{\mathcal{N}}_{\mathcal{T}_Z} + 1).$$

In case $\mathcal{T}_U \leqslant \mathcal{T}_Z$, this upper bound for $V_0^{\mathcal{T}_U}(\tilde{\mathcal{S}}.)$ is good enough. So consider the case $\mathcal{T}_Z < \mathcal{T}_U$ and write

$$V_0^{\mathcal{T}_U}(\tilde{\mathcal{S}}.) = V_0^{\mathcal{T}_Z}(\tilde{\mathcal{S}}.) + V_{\mathcal{T}_Z}^{\mathcal{T}_U}(\tilde{\mathcal{S}}.).$$

By (22) and the definition of $\mathcal{T}_Z$,

$$V_{\mathcal{T}_Z}^{\mathcal{T}_U}(\tilde{\mathcal{S}}.) \leqslant 6.$$

Summarizing,

$$\mathscr{M} \leqslant \frac{1}{v}\left(8 + 2\tilde{\mathcal{N}}_{\mathcal{T}_Z}\right)$$

and the result then follows from Proposition 8. □

A Multi-scale estimates and renewal argument

In this appendix we adapt the proof of Proposition 1 in [2] to obtain our Proposition 8. The system that we consider here differs from that handled in [2] in the following aspects: the speed v is a finite number; the service times T are not deterministic; the initial state is α-unimodal rather than unimodal. This implies slight differences in the parameters of the multi-scale construction, and we restrict ourselves to the description of such parameters. The reader is refered to [2] for the details of how the estimates are obtained.

Afterwards, in order to get tightness of $\mathcal{N}_\mathcal{T}$, we need that the probability of success in each block j not only be bounded from below by some p_j but actually equal to p_j. We introduce an artificial coin toss to provide this last ingredient.

Since only $\tilde{\mathcal{U}}$ is concerned, we shorten notation and write $\mathcal{U}$ instead. Each time C or c appears, it denotes a different constant that is positive, finite, and depends only on v.

Multi-scale construction Let $\mathcal{A}_t = \sigma((\mathcal{U}_s)_{s\in[0,t]})$ denote the natural filtration for $(\mathcal{U}_t)_{t\geqslant 0}$. We construct a sequence of stopping times $0 = L_0 < L_1 < \cdots$ and define the corresponding events of success $A_j \in \mathcal{A}_{L_{j+1}}$ in terms of $\mathcal{U}_{L_j}$. The construction will have the following properties. For some sequence p_j and any $\mathcal{U}$ that is α-unimodal,

$$\mathbb{P}^{\mathcal{U}}(A_j|\mathcal{A}_{L_j}) = \mathbb{P}^{\mathcal{U}}(A_j|\mathcal{U}_{L_j}) \geqslant p_j \text{ on } A_0\cap\cdots\cap A_{j-1}, \quad \text{and} \quad \prod_j p_j > 0. \tag{24}$$

The event $\cap_{j=0}^{\infty} A_j$ implies strong transience of $(\mathcal{S}_t)_{t\geqslant 0}$. Almost surely, for each $j = 0, 1, 2, \ldots$, the sate of $\mathcal{U}_{L_j}$ is *serving*.

We assume without loss of generality that the state of $\mathcal{U}_0$ is serving, and that $\mathcal{S}_0 = 0$.

Take $\sigma = \operatorname{sgn} \mathcal{S}_{L_1}$ to indicate the direction in which subsequent blocks are supposed to grow. Let $Z_j = \sigma\mathcal{S}_{L_j}$, $N_j = L_j - u(\mathcal{S}_{L_j})$, $Q_j = \mathcal{N}_{L_{j+1}} - \mathcal{N}_{L_j}$, $X_j = Z_{j+1} - Z_j$, $M_j = L_{j+1} - L_j$.

The triggering step $j = 0$ is defined as follows. We always take $Q_0 = 1$, and the first step consists of finishing with the customer that was being served at time L_0-, then traveling towards the nearest customer at position σZ_1, and L_1 is the stopping time attained as soon as the server reaches this position. The event A_0 means success at the step $j = 0$, and is defined by the following conditions: $X_0^- \leqslant X_0 \leqslant X_0^+$ and $M_0^- \leqslant M_0 \leqslant M_0^+$, where $X_0^- = \frac{9}{N_1}$, $X_0^+ = 36$, $M_0^- = 1$, and $M_0^+ = 2 + \frac{36}{v}$. In the sequel we assume without loss of generality that $\sigma = +1$.

For $j \geqslant 1$, we take $\ell_j = \lceil 54 j^{1/4} \rceil$, $D_j = \frac{1}{36}\ell_j$, and define the event A_j as in [2], with condition (4) there replaced by

$$\begin{cases} Q_j^- \leqslant Q_j \leqslant Q_j^+, \quad X_j^- \leqslant X_j \leqslant X_j^+, \quad M_j^- \leqslant M_j \leqslant M_j^+, \\ V_{L_j}^{L_{j+1}}(\mathcal{S}.) \leqslant X_j + \frac{4D_j}{N_j}, \quad Z_{j-1} < \mathcal{S}_t < Z_{j+1} \text{ for } L_j \leqslant t < L_{j+1}, \end{cases} \tag{25}$$

where $Q_j^- = \ell_j, Q_j^+ = \ell_j + 1, X_j^- = \frac{\ell_j - 1}{3N_{j+1}}, X_j^+ = \frac{3\ell_j}{N_j}, M_j^- = \frac{1}{2}Q_j^-, M_j^+ = 2Q_j^+ + \frac{3X_j^+}{v}$. Here the time L_{j+1} is given by the instant when the server reaches the last customer, located at Z_{j+1}, and the next block starts with this customer being served.

Notice that $A_0 \cap \cdots \cap A_{j-1}$ implies that $M_j^- \geqslant Cj^{1/4}, N_j = -u(\sigma Z_j) + L_j \geqslant L_j \geqslant M_0^- + \cdots + M_{j-1}^- \geqslant Cj^{5/4}, X_j^+ \leqslant Cj^{-1}, X_{j-1}^- \leqslant Cj^{-1}$, and thus $M_j^+ \leqslant Cj^{1/4}$. Moreover, since $\mathcal{U}$ evolves by (3) and (5), the condition of $\mathcal{U}_t$ being α-unimodal is preserved for all t, and, for $j \geqslant 1$, the event A_{j-1} implies the following conditions on $\mathcal{U}_{L_j}$:

$$\begin{cases} u_{L_j}(x) = u_0(x) - L_j \leqslant -\frac{N_j}{2} & \text{for } x > Z_j, \\ u_{L_j}(x) \geqslant -M_{j-1} & \text{for } Z_j - X_{j-1}^- < x < Z_j. \end{cases}$$

Recall from [2] the definition of $R_2 \subseteq \mathbb{R} \times \mathbb{R}$, which in our setup is contained in the union of $[Z_j - X_{j-1}^-] \times [-M_{j-1}^+, M_j^+]$ and $[Z_j, Z_j + X_j^+] \times [0, M_j^+]$. The above inequalities imply that $|R_2| \leqslant (X_{j-1}^- + X_j^+)(M_{j-1}^+ + M_j^+) \leqslant Cj^{3/4}$.

We now estimate the probability of success $\mathbb{P}^{\mathcal{U}}(A_j | \mathcal{U}_{L_j})$ on A_{j-1} by considering a number of events that imply A_j.

For $j = 0$, consider the event that the first service takes a time T with $1 < T < 2$ and, when sampling for the next customer as in (4)-(5), we have $36 < E < 72$. This implies the bounds on X_0 and M_0 as in [2].

For $j \geqslant 1$, again as in [2] define $A(x) = \int_{Z_j}^{x} [-u_{L_j}(z)] \mathrm{d}z$, $x \geqslant Z_j$. With positive probability, and tending to 1 fast as $j \to \infty$, both events

$$\frac{2}{3}(\ell_j - 1) \leqslant A(x_{\ell_j - 1}) \leqslant A(x_{\ell_j}) \leqslant \frac{3}{2}\ell_j$$

and

$$A(x_n) - A(x_{n-1}) \leqslant D_j \qquad \text{for } n = 1, 2, \dots, \ell_j$$

occur. But since $\mathcal{U}_{L_j}$ is α-unimodal we get

$$\frac{1}{2}N_j \leqslant \frac{A(x_n) - A(x_{n-1})}{x_n - x_{n-1}} \leqslant 2N_{j+1},$$

which, on the occurrence of the above events, implies that $X_j^- \leqslant X_j \leqslant X_j^+$ and $x_n - x_{n-1} \leqslant \frac{2D_j}{N_j} = \frac{\ell_j}{18N_j} \leqslant \frac{X_{j-1}^-}{3}$. As shown in [2], this bounds Q_j, X_j, $V_{L_j}^{L_{j+1}}$, and $(\mathcal{S}_t)_{t\in[L_j,L_{j+1})}$.

It remains to control M_j, which was not necessary in [2] because $M_j = Q_j$ in that setup $(T = 1, v = \infty)$. But M_j is composed of Q_j service times and $v^{-1}V_{L_j}^{Lj+1}(\mathcal{S}.)$ traveling time. The latter is non-negative and bounded by $2X_j/v$, which is bounded by $2X_j^+/v$. Therefore the inequality $M_j^- \leqslant M_j \leqslant M_j^+$ holds whenever the sum of Q_j service times is bigger than $Q_j/2$ and less than $2Q_j$, which in turn occur with exponentially high probability in ℓ_j.

Finally we use the bound on $V_{L_j}^{L_{j+1}}(\mathcal{S}.)$ to prove strong transience. We add the requirement that $V_{L_j}^{L_{j+1}}(\mathcal{S}.) = X_j$ for $j = 1$. This changes the lower bound on probability of A_1, but it remains positive. Notice that the same equality is true for $j = 0$ by construction. Now one can decompose $V_0^t(\mathcal{S}.)$ in distances traveled in each of the two possible directions and again decompose these distances in the contribution from each block, and combine the bounds on X_{j-1} with $\frac{4D_j}{N_j} \leqslant \frac{2}{3}X_{j-1}^-$ to get $V_0^t(\mathcal{S}.) \leqslant \frac{5}{3}\mathcal{S}_t$.

Renewal argument Having (24) in hands, we finally prove tightness of $\mathcal{N}_{\mathcal{T}_Z}$. Enlarge the underlying probability space to add an independent sequence of i.i.d. uniform variables $\tilde{U}_j$. For each j, define the event $\tilde{A}_j \subseteq A_j$ by

$$\tilde{A}_j = A_j \cap \left[\tilde{U}_{j+1} < \frac{p_j}{\mathbb{P}(A_j|\mathcal{U}_{L_j})}\right].$$

In words, we add an extra coin toss in order to have an exact equality instead of an upper bound:

$$\mathbb{P}^{\mathcal{U}}(\tilde{A}_j|\mathcal{U}_{L_j}) = p_j \text{ on } \tilde{A}_0 \cap \cdots \cap \tilde{A}_{j-1}.$$

Notice that $J^0 = \min\{j : \tilde{A}_{j-1} \text{ does not occur}\} \in \{1, 2, 3, \dots\} \cup \{\infty\}$ is a stopping time with respect to $\{\tilde{\mathcal{A}}_j\}_{j=0,1,2,\dots}$, where $\tilde{\mathcal{A}}_j = \sigma(\mathcal{A}_{L_j}, \tilde{U}_0, \tilde{U}_1, \dots, \tilde{U}_{j-1}, \tilde{U}_j)$. The distribution of J^0 is given by $\mathbb{P}(J^0 > k+1) = p_0 p_1 \cdots p_k$. If $J^0 = \infty$, we have success for all j and $(\mathcal{S}_t)_{t\geqslant 0}$ is strongly transient, and we can take $\mathcal{T}_Z = 0$.

If otherwise, $J^0 < \infty$, we have $\mathcal{N}_{L_{J^0}} \leqslant Q^+(J^0)$, where $Q^+(j) = Q_0^+ + Q_1^+ + \cdots + Q_j^+$. In this case we can apply a time shift of L_{J^0} and define $(\mathcal{U}_t^1)_{t\geqslant 0}$ by $\mathcal{U}_t^1 = \mathcal{U}_{t+L_{J^0}}$. For this evolution $(\mathcal{U}_t^1)_{t\geqslant 0}$ we can define the stopping times $L_0^1, L_1^1, L_2^1, \dots$, the events $\tilde{A}_0^1, \tilde{A}_1^1, \tilde{A}_2^1, \dots$, and the step of first failure J^1.

By the strong Markov property, the conditional distribution of $(\mathcal{U}_t^1)_{t\geqslant 0}$ given that $J^0 < \infty$ is given by $\mathbb{P}^{\mathcal{U}_{L_{J^0}}}$, and since $\mathcal{U}_{L_{J0}}$ is α-unimodal, the conditional distribution of J^1 given that $J^0 < \infty$ is the same: $\mathbb{P}(J^1 > k+1 | J^0 < \infty) = p_0 p_1 \cdots p_k$.

Again, if $J^1 = \infty$, $(\mathcal{S}_{t+L_{J0}})_{t\geqslant 0}$ is strongly transient and we take $\mathcal{T}_Z = L_{J^0}$. Otherwise, $\mathcal{N}_{L_{J^0}+L^1_{J^1}} \leqslant Q^+(J^0)+Q^+(J^1)$. Analogously we can construct $\mathcal{U}^2$, J^2,$\mathcal{U}^3$, $J^3, \dots$ until at some step $K+1$ we get $J^{K+1} = \infty$. In this case we have that $(\mathcal{S}_{t+\mathcal{T}_Z})_{t\geqslant 0}$ is strongly transient for $\mathcal{T}_Z = L_{J^0} + L^1_{J^1} + \cdots + L^K_{J^K}$. We then take $\mathcal{T}_Z = L_{J^0} + L^1_{J^1} + \cdots + L^K_{J^K}$. As before, $\mathcal{N}_{\mathcal{T}_Z} \leqslant Q^+(J^0) + Q^+(J^1) + \cdots + Q^+(J^K)$. But the distribution of the latter upper bound does not depend on $\mathcal{U}$, and therefore $\mathcal{N}_{\mathcal{T}_Z}$ is tight.

Acknowledgments

We are grateful to S. Foss, who introduced us to this problem. We thank M. Jara for useful discussions.

References

[1] J. E. G. Coffman and E. N. Gilbert, *Polling and greedy servers on a line*, Queueing Systems Theory Appl., 2 (1987), pp. 115–145.

[2] S. Foss, L. T. Rolla, and V. Sidoravicius, *Transience of a server with greedy strategy on the real line*, 2011. arXiv:1111.4846v3.

[3] L. Rojas-Nandayapa, S. Foss, and D. P. Kroese, *Stability and performance of greedy server systems: A review and open problems*, Queueing Syst., 68 (2011), pp. 221–227.